


TAKAISKUVENTTIILIT

KRD-Y-G-XC/PTFE

Vinotakaiskuventtiili AISI 316

DN8-80

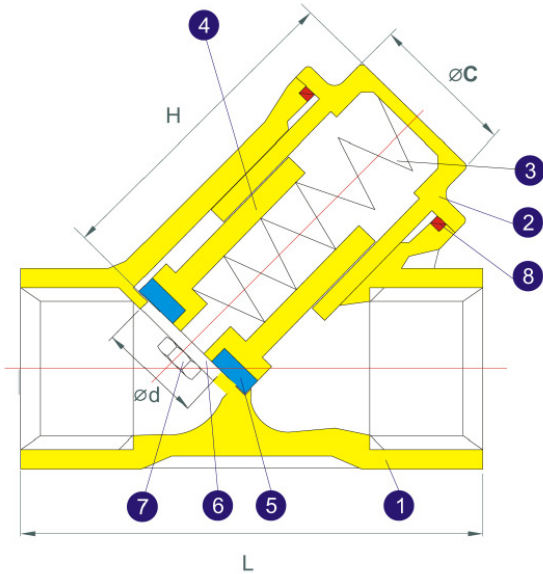

OSAT

| Ref. | Osa | Lkm | Materiaali |
|------|----------|-----|-------------------|
| 1 | Runko | 1 | ASTM A351 Gr CF8M |
| 2 | Kansi | 1 | ASTM A351 Gr CF8M |
| 3 | Jousi | 1 | AISI 316 |
| 4 | Istukka | 1 | AISI 318 |
| 5 | Tiiviste | 1 | PTFE |
| 6 | Aluslevy | 1 | AISI 304 |
| 7 | Pultti | 1 | AISI 304 |
| 8 | Tiiviste | 1 | PTFE |

MITAT JA PAINOT

| DN | PN | Koko | ØC | H | L | kg |
|----|-------|--------|----|-----|-----|------|
| 8 | 10-55 | 1/4" | 19 | 46 | 65 | 0,27 |
| 10 | 10-55 | 3/8" | 19 | 46 | 65 | 0,26 |
| 15 | 10-55 | 1/2" | 19 | 46 | 65 | 0,26 |
| 20 | 10-55 | 3/4" | 23 | 58 | 80 | 0,42 |
| 25 | 10-55 | 1" | 27 | 69 | 90 | 0,80 |
| 32 | 10-55 | 1 1/4" | 32 | 75 | 105 | 1,00 |
| 40 | 10-55 | 1 1/2" | 41 | 85 | 120 | 1,50 |
| 50 | 10-55 | 2" | 50 | 98 | 140 | 2,20 |
| 65 | 10-55 | 2 1/2" | 58 | 121 | 170 | 5,05 |
| 80 | 10-55 | 3" | 58 | 134 | 200 | 7,40 |

PAINE/LÄMPÖTILA

Max. paine / lämpötila

