

WTX-2000/1500/2000S PTZ Controller




FEATURES

- Keyboard to control PTZ and DVR
- Recalls up to 255 cameras from one keyboard.
- 3-Axis Joystick control of PTZ functions
- Built-in Graphic LCD monitor with blue screen.(WTX-2000)
- Programmable user preferences. (preset, tour, pattern, etc.).
- User password support.
- Supported DVR protocol (Need to be modified)
- Multiple protocol supported in each channel (Pelco D, Pelco P, Samsung, DRX-502)
- Slave Keyboard support.

SPECIFICATIONS


Model	WTX-2000 / WTX-1500 / WTX-2000S
Keyboard Communication	Pan/Tilt interface : RS-485
	DVR interface : RS-485
	Pan/Tilt operating distance : 4000 ft (1029 m) on 24 AWG wire
	Multiple Protocol Support (Baud rate selectable)
	RJ-11 6-pin modular connector
Keyboard Keypad	PC Keyboard button, Numeric keypad and camera function keys.
Joystick	Proportional 3-Axis, variable speed with zoom
Input Voltage	12VDC $\pm$ 2V
Power Consumption	Max. 450mA, (WTX-2000S : 250mA)
LCD Display	Alpha numeric LCD display (WTX-2000) 2 lines character LCD display (WTX-1500)
Operating Temperature	0° to 45°C
Humidity	10%-70% RH
Certification	CE, FCC, RoHS
Dimensions, Weight	WTX-2000, WTX-1500 : 364(W) x 125(H) x 145(D), 1.4kg
	WTX-2000S : 130(W) x 125(H) x 145(D), 0.8kg

CONFIGURATIONS

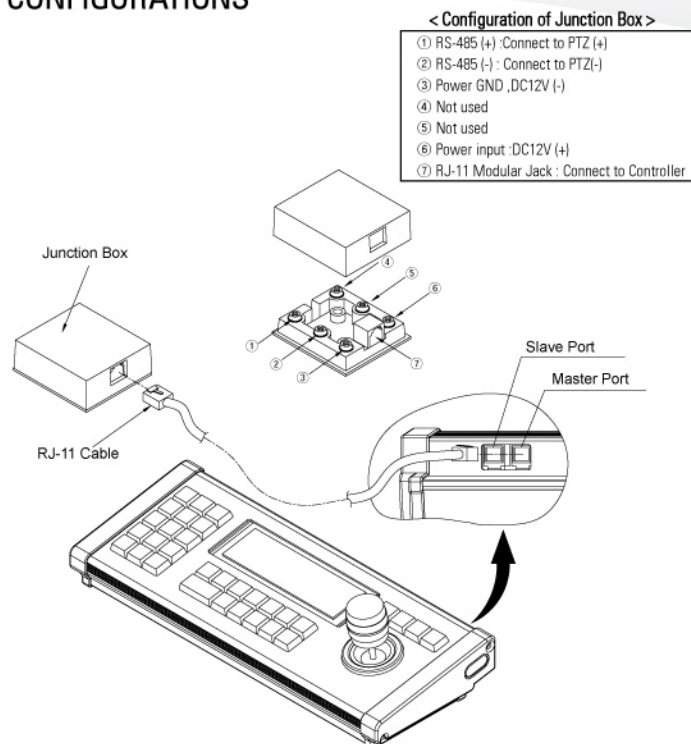

DIMENSIONS (mm)

WTX-2000/1500

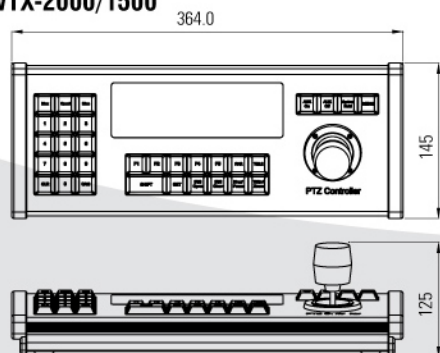

WTX-2000S

