

15.6" SDI Monitor

FEATURES

- True Color Processing engine.
- Dynamic Control engine.
- Friendly OSD Function Controls.
- LED Backlight.
- VESA Standard Bracket.
- Aluminum frame/Metal Case (ALL)

OPTION

- Touch screen
- Rack Mount
- Non-glare glass



SPECIFICATIONS


Standards	3G-SDI(SMPTE 424M),HD-SDI(SMPTM 292M),SD-SDI(SMPTE 259M)
Video support	[3G]1080P50/60(4:2:2), [HD]720P@50/60Hz,1080P25/30Hz,[SD]NTSC/60Hz,PAL/50Hz
Video Bandwidth	2.97Gpbs&2.975/1.001Gpbs
Cable Transmission	3G-SDI(100Meter),HD-SDI(200Meter),SD-SDI(300Meter) (5C2V/RG6Cable)
Power input	AC100-240V 50/60Hz, Adapter DC12V/5A

SPECIFICATIONS

MODEL	CH-L156AV-HAV-SDI	CH-L156-HDVS-SDI
LCD Panel	15.6"	
Viewable Area (H/V-mm)	344.1 x 193.5	
Profile Ratio	16 : 9	
Max. Resolution (H/V)	1920 x 1080	
Pixel dot pitch (mm)	0.17925 x 0.17925	
Display Colors	262K	
Brightness (nit)	300 [LED]	
Contrast Ratio	600:1	
Response Time (Tr/TF-ms)	3/8 ms	
Viewing Angle (U/D/L/R)	60 / 60 / 70 /70	
Dimensions (WxHxD) mm	401.5 x 251 x 60.3	
Weight	3.4kg	
Operating temperature	0° to 40° C	

CONNECTORS

CH-L156AV-HAV-SDI Model

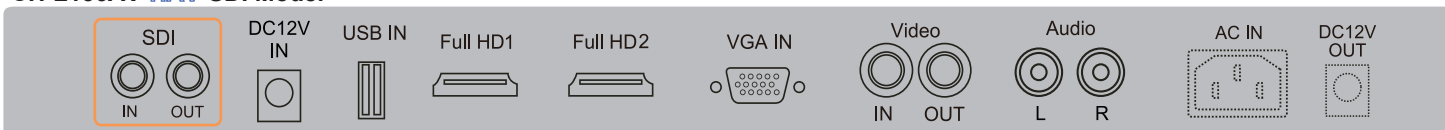

CH-L156-HDVS-SDI Model

