


| Anti-Corrosion Stainless Steel Bullet Camera System

2MP Full HD AHD Camera



iSTA-B101S

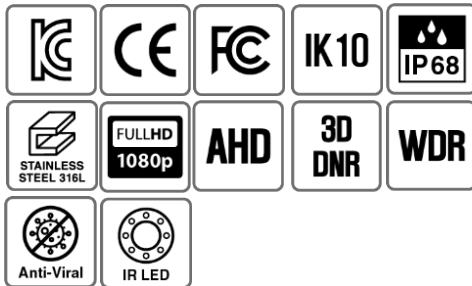

Key Features

- AISI 316L Stainless Steel
- Ingress Protection Rating : IP68
- Impact Protection Rating : IK10
- 1/3" Sony CMOS Sensor
- 2MP Full HD(1920 x 1080) / 30fps – 720 / 60fps
- 2.7~12mm Motorized Lens
- Minimum Illumination : 0.0001 Lux / F1.2
- HD-SDI, EX-SDI, HD-CVI, HD-TVI, AHD, CVBS All-in-one
- True Day & Night / True Wide Dynamic Range / 3DNR
- Operating Temperature and Humidity :-10°C ~ 50°C / Less than 95% RH
- IR LED (Visible Distance : 30~40 meters)
- Live Defect Detection and Correction
- Support Multi Language(English / Chinese / Japanese / Korean)
- Corrosion Resistance for Ships / Marine Environments, etc.
- Antiviral / Antibacterial Properties for Hospitals / Pharmacies / Food Materials Sanitary Environment, etc.
- Chemical Resistance Characteristics for Chemical Plants / Hazardous Chemical Handling Environment

SPECIFICATION

Structure Material	AISI 316L Stainless Steel
Ingress Protection Rating	IP68
Impact Protection Rating	IK10
Image Sensor	1/2.8" SONY CMOS
Lens	2.7~12mm Motorized Lens
Total Pixel	1945(H) x 1109(V) approx. 2.16M pixels
Active Pixel	1945(H) x 1097(V) approx. 2.13M pixels
Scanning system	Progressive
Resolution	Digital: 1080(30P), 720(60P) Max: 1,100TV lines(1080P)
Min. Illumination	0.0001 lux/F1.2
Video Output	HD-SDI, EX-SDI, HD-TVI: 1080P 30FPS, 720P 60FPS, AHD CVBS: NTSC/PAL
S/N Ratio	More than 50dB (AGC off)
AGC	Off/0 – 10
Shutter Speed	AUTO/MANUAL(1/30 - 1/30,000 sec)
SENS-UP	Off/X2 – X32
Brightness	0 – 20
WDR/BLC	Off/BLC/WDR
D-WDR(ACE)	Off/LOW/MIDDLE/HIGH
Defog	Off/LOW/MIDDLE/HIGH
Day & Night	AUTO/COLOR/B&W/EXTERN
White Balance	AUTO/AUTO ext/PRESET/Manual
DNR (Digital Noise Reduction)	Off/LOW/MIDDLE/HIGH
Mirror	Off/On
Flip	Off/On
Sharpness	0 – 10 steps
Privacy Mask	16 Masks
Motion Detection	Off/On
Language	English/Chinese/Chinese(S) /Japanese/Korean
Operating Temperature / Humidity	-25°C ~ +55°C / Less than 95% RH
Size	106 (W) x 143.7(H) x 167(L) mm
Weight	2.5 Kg

DIMENSION(MM)

