


CODE: **AWT8172430** v 1.1/XII
NAME: **TRANSFORMER TRZ 80/17/24/30**

EN

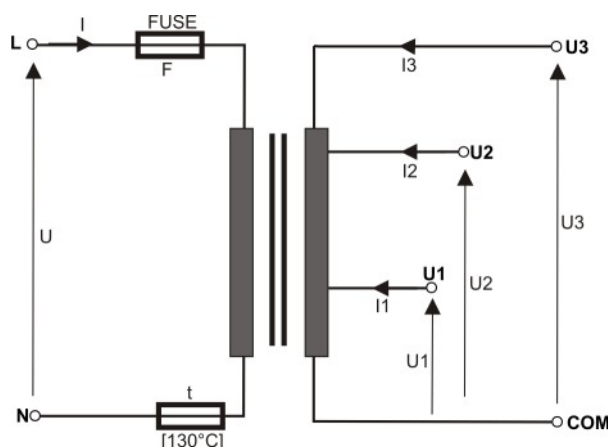

Technical data of transformers: TRZ
Tab. 1

CODE NAME	S	U	I	U1 or U2 or U3	I1 or I2 or I3	F	t
AWT8172430 TRZ 80/17/24/30	80VA	230 V AC	0,4A	17 V or 24 V or 30 V	4,7A or 3,3A or 2,7A	T 630mA/250V	130°C

DESTINATION

The transformers are destined for supplying devices requiring AC voltage U1 or U2 or U3.

TECHNICAL DATA

Enclosure:	PC/ABS in class UL 94 V-0, IP43
Dimensions:	Fig.1 TRZ 80
Net/gross weight:	1,70kg / 1,78 [kg] TRZ 80
Installation:	- to be mounted on a flat surface, cheese head screws required x4 - for mounting on a DIN rail, required bracket: DIN2
Supply voltage:	230 V AC (-15%+10%), 50Hz
Current consumption I:	tab.1. @~230V / I1
Output voltage U1 or U2 or U3:	tab.1.
Rated power S:	tab.1.
Rated output current I1 or I2 or I3:	tab.1.
Short-circuit protection F:	glass fuse tab.1.
Over-load protection t:	glass fuse tab.1. / thermal fuse 130°C (non-returnable)
Operating conditions:	II environment class, -10°C – +40°C, Ta 40B
Declarations, warranty:	CE, 2 years
Notes:	leads on connectors AWG 24-12 (2,5mm ²), kit for mounting (sheet metal screws 2,9 x 9,5 – 4 pcs. and plugs)

Dimensions of transformers series: TRZ 80VA

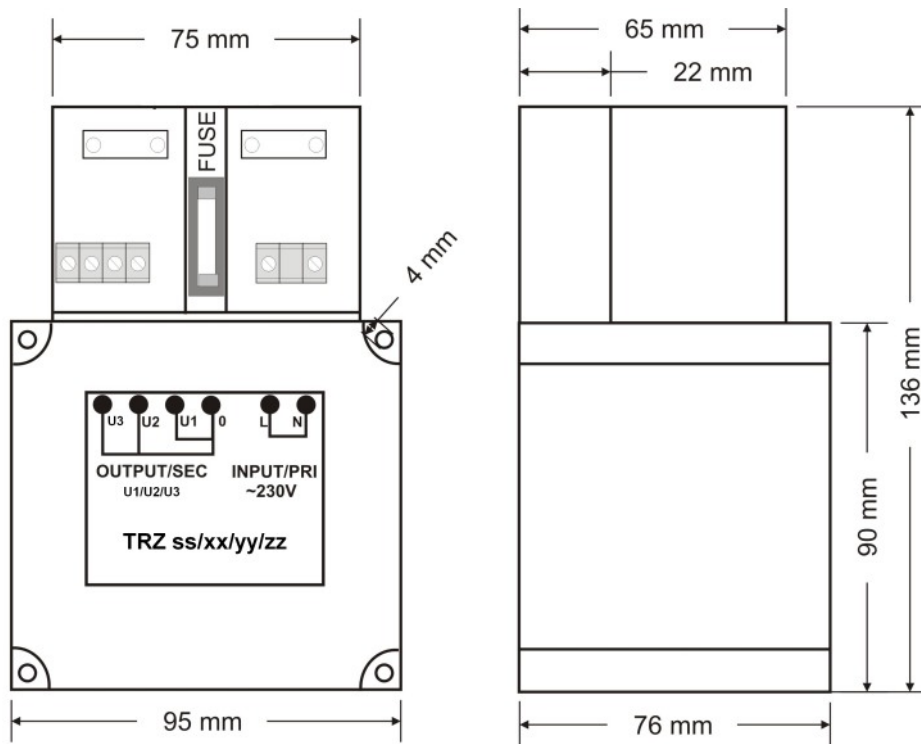


Fig.1