

MB-A308-L2

WONWOO



2MP 30x Box Camera



Features

- 1/2.8" Sony CMOS Sensor
- AHD, CVBS
- 30x Optical Zoom(4.6 mm ~ 136.0 mm) & x32 Digital Zoom
- Wide Dynamic Range
- Digital Noise Reduction
- Digital Slow Shutter
- Digital Image Stabilization
- Defog Function
- High Light Compensation
- ACE(Digital WDR)
- Privacy Mask Function
- Motion Detection
- Zoom / Focus External Control

Dimensions

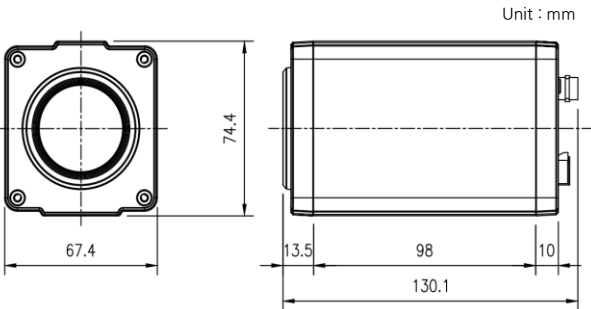

MB-A308-L2				
CAMERA				
Image Sensor		1/2.8" Sony CMOS Sensor		
Total Pixels		1945(H) x 1109(V) = 2.16M Pixels		
Active Pixels		1945(H) x 1097(V) = 2.13M Pixels		
Scanning System		Progressive Scan		
Video Format		1080p@30/25fps, 720p@60/50fps, 720p@30/25fps		
Min. Illumination	COLOR	0.005 lux / DSS 0.00125 lux		
	BW	0.0008 lux / DSS 0.0002 lux		
S/N Ratio		more than 50dB(AGC off)		
Video Output		AHD, CVBS		
LENS				
Lens Type		30x Day & Night Zoom Lens		
Zoom Ratio		Optical 30x, Digital x32 Zoom		
Focal Length		f = 4.6 mm ~ 136.0 mm		
Aperture Ratio		F1.63(Wide) ~ F4.85(Tele)		
Angle Of View (D, H, V)	WIDE	73.3°	65.4°	38.3°
	TELE	2.6°	2.2°	1.3°
CAMERA FUNCTIONS				
Camera Title		ID / Title / Zoom Ratio / System Message		
Day & Night		Auto / Day / Night / Ext-In		
WDR/BLC		Off / WDR / BLC / HLC		
ACE		Off / Low / Middle / High		
DNR		Auto / Off / Low / Middle / High		
Defog		Off / On(Auto / Manual)		
Image Stabilization		Off / On		
Motion Detection		Off / On(3 positions)		
Privacy Mask		Off / On(24 positions)		
Digital Slow Shutter		Off / x2 / x4 / x8(60fps or 50fps Mode Only)		
Gain Control		Off / On		
White Balance		Auto / One Push / Manual / Indoor / Outdoor		
Shutter Speed		1/30(25) ~ 1/30,000 sec		
E.Zoom		Off / x2 ~ x32		
Digital Flip		Off / H / V / H&V		
GENERAL				
Power Source		9V to 15V DC		
Power Consumption		Max 500mA		
Operating Temperature		-10°C ~ +50°C / 0% ~ 90% RH		
Dimensions		67.4(W) x 74.4(H) x 130.1(D) mm		
Weight		0.57kg		