SALES SERVICE
+358 (0)17 262 3555
info@econosto.fi

MDV-GT

Gate valve

MDV-GT

Gate valve MDV-GT

EU 97/23/EC NB CE 0035

EN 10204 3.1



screwed-in bonnet, non rising stem
full bore, solid wedge disc
f/f thread ISO 228-1G or ANSI B1.2.0.1 (NPT)
nominal pressure NB 8 (1/4") - NB 25 (1") : PN 63
nominal pressure NB 32 (1.1/4") - NB 50 (2") : PN 40
PTFE seats and seals
temperature -20°C upto 180°C

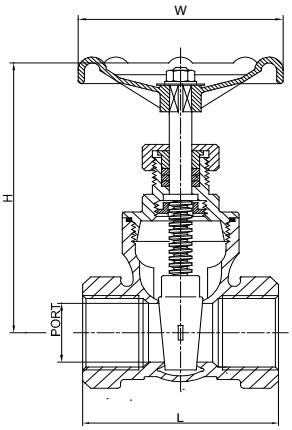

NB	INCH	PORT mm	H(open) mm	L mm	L/2 mm	W mm	Art. no.	Kg / pc	CF8 304 ISO	CF8 304 NPT	CF8M 316 ISO	CF8M 316 NPT
NB 8	1/4"	11	87,0	50,0	25,0	70	VG10	0,33	o	o	●	o
NB 10	3/8"	12	92,0	55,0	27,5	70	VG10	0,38	o	o	●	o
NB 15	1/2"	15	92,0	55,0	27,5	70	VG10	0,38	o	o	●	o
NB 20	3/4"	20	97,0	60,5	30,0	70	VG10	0,50	o	o	●	o
NB 25	1"	25	108,5	65,5	32,5	80	VG10	0,70	o	o	●	o
NB 32	1.1/4"	32	123,5	76,5	37,5	80	VG11	1,05	o	o	●	o
NB 40	1.1/2"	40	146,0	85,5	42,5	90	VG11	1,40	o	o	●	o
NB 50	2"	50	162,0	95,5	47,5	100	VG11	2,05	o	o	●	o